

# Above Ground Weight Bridge

 **RSO Trading**

Qom , Iran


P.O.Box : 37158-39953

☎: +98 2532912510

📠: +98 2532912510

[RSOTrading.com](http://RSOTrading.com)

[✉:info@rsotrading.com](mailto:info@rsotrading.com)

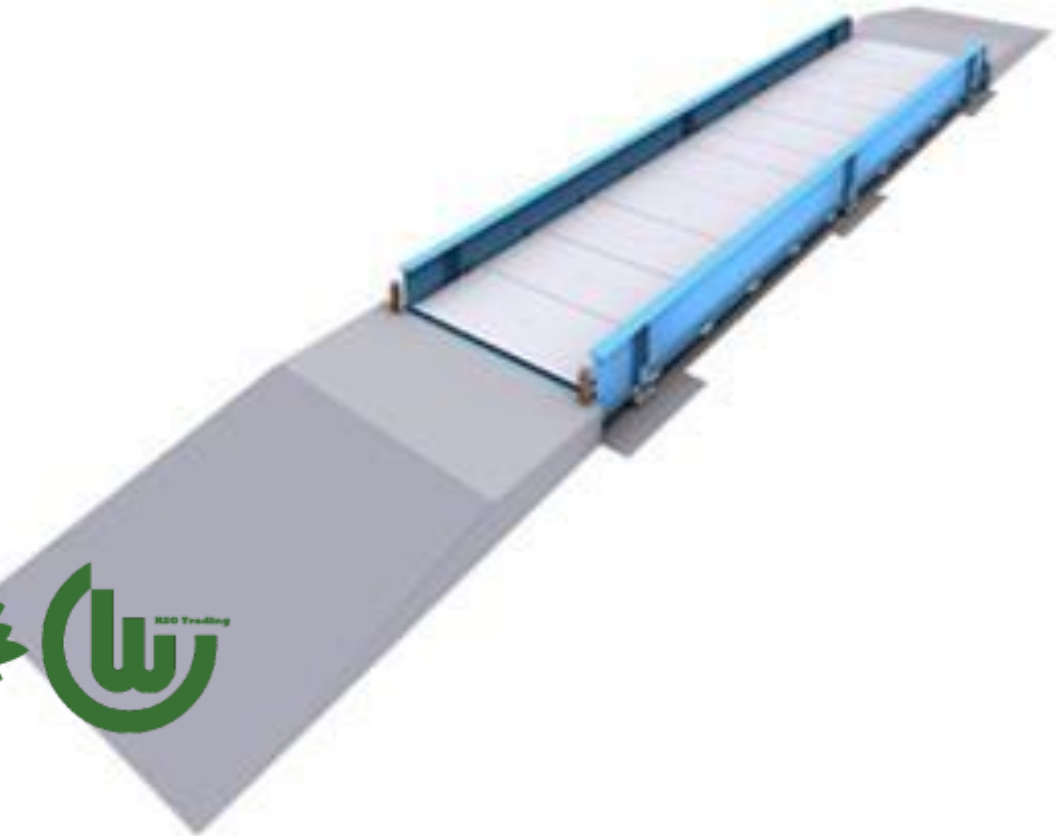



### The Main Technical Features:

- ❖ Being at the same level with the ground surface
- ❖ need to be concaved deeper compared to the on ground weight bridges
- ❖ Suitable for areas where groundwater level is not high.
- ❖ No need for ramps
- ❖ Less platform fatigue due to its structural nature
- ❖ The full metal above ground weight bridges are available in different weight capacities.

They are able to tolerate weights from 50 tons up to 80 tons.

Weight Capacity	80 T	60 T	50 T
Dimensions	3*18 m	3*16 m	3*18
Monitor	TEC-1500A	TEC-1500A	TEC-1500A
Printer	EPSONLQ-300	EPSONLQ-300	EPSONLQ-300
Covering Sheet Thickness	MM10	MM10	MM10
Plate Type	full Metal	full Metal	full Metal
Load-cell Capacity	30 t	30 t	30 t
total of Load-cells	6	6	4
Load cells Capacity	180 t	180 t	120 t
Zineh	10 kg	10 kg	10 kg
maximum Safe capacity	360 t	360 t	240 t
Strength	180 t	180 t	90 t

